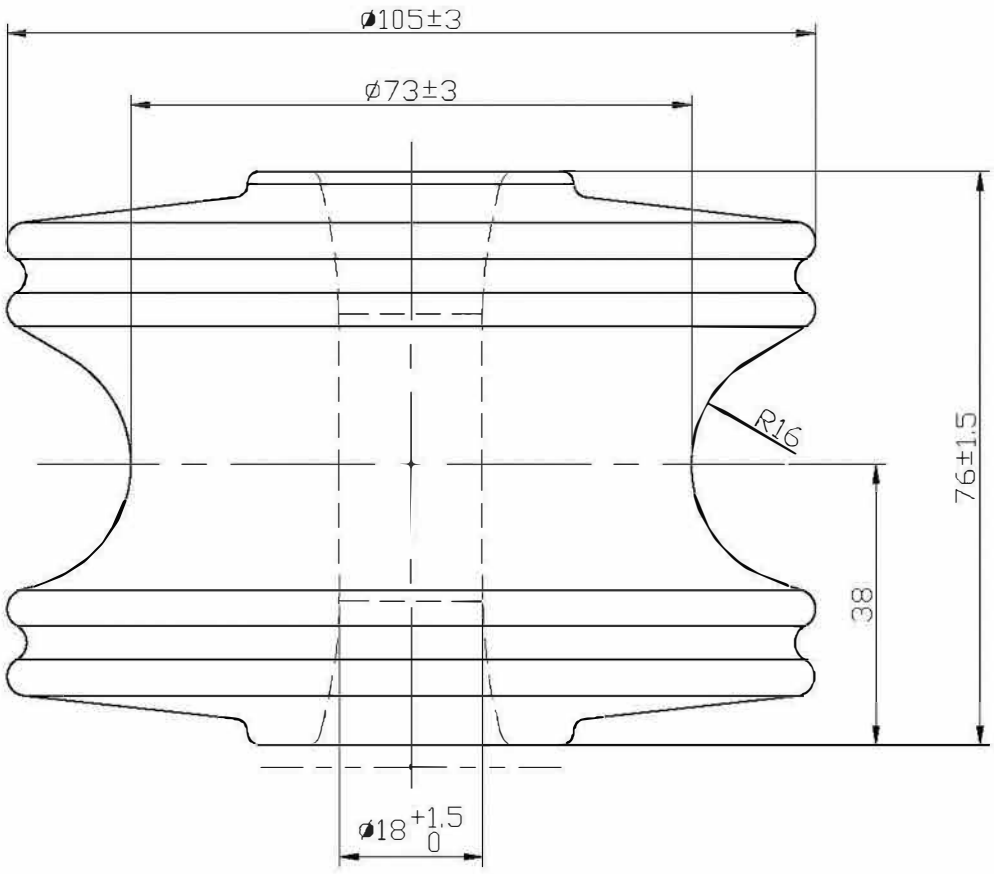

TECHNICAL DATA:

Type		ANSI 53-4
Standards Applied		ANSI C29.3
Main dimensions	D:	4.13" (105mm)
	H:	3" (76mm)
	d:	2.87" (73mm)
	R:	0.63" (16mm)
	d1:	0.71" (18mm)
Mechanical failing load		4500pounds (20kN)
Low frequency Dry flashover voltage		25kV
Low frequency Wet flashover voltage	(Vertical)	12kV
	(Horizontal)	15kV

Visual and Dimensional Inspection According to IEC 383

*****MATERIAL:PORCELAIN

NEWELL-PSN LLC

DESINGN		DRAWING	CY2.828.007	SPOOL INSULATORS ANSI 53-4
CHECK		REVISION	Mar.02,2010	
ISSUED				2335340-7001