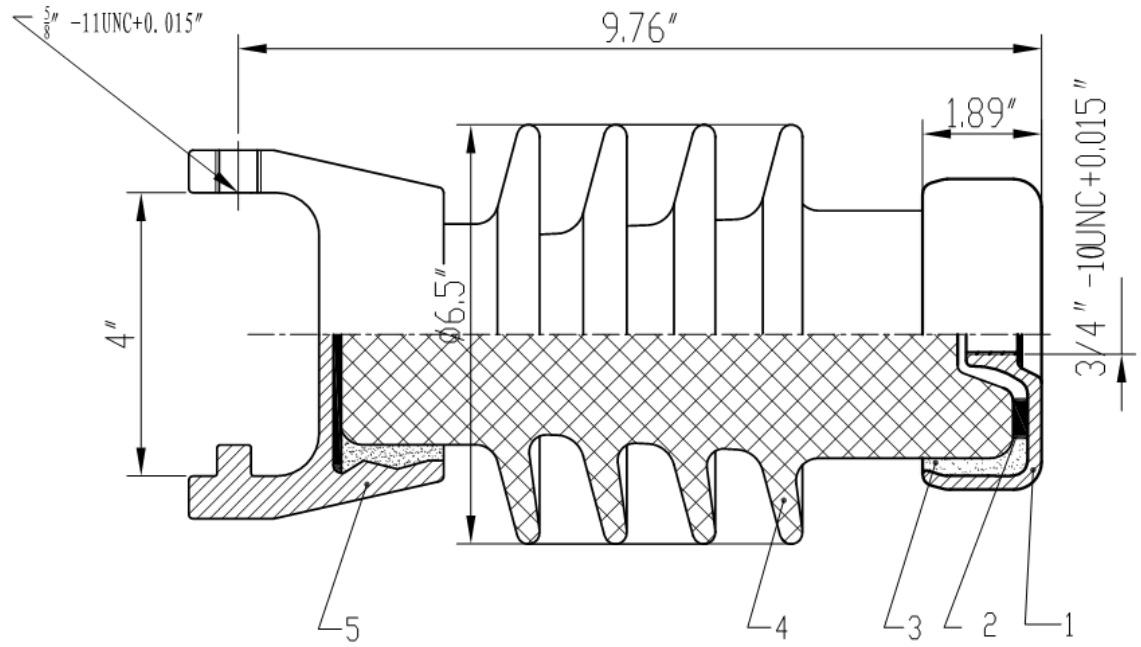

Technical requirement:

1. Creepage distance, in	14
2. Dry arcing distance, in	6.5
3. Cantilever strength, lbs	2800
4. 60Hz frequency flashover voltage dry, kV	80
5. 60Hz frequency flashover voltage wet, kV	60
6. Critical impulse flashover voltage positive, kV	130
7. Critical impulse flashover voltage negative, kV	155
8. Color:	Grey
9. Applicable standard:	ANSI C29.1& C29.7

№	DRAWING №	NAME	QTY	MATERIAL	ONE WEIGHT	TOTAL WEIGHT	NOTE
5		FITTING	1	QT450-10			
4		PORCELAIN	1	IV			
3		CEMENT					
2		CORK	1				
1		FITTING	1	QT450-10			

SIGN	QTY	REJIGGER №	NAME	DATE
DRAWN				
CHECKED				
APPROVE				
DATE				

43920-7001

INSULATOR

MATERIAL

PHASS SIGN	WEIGHT	SCALE