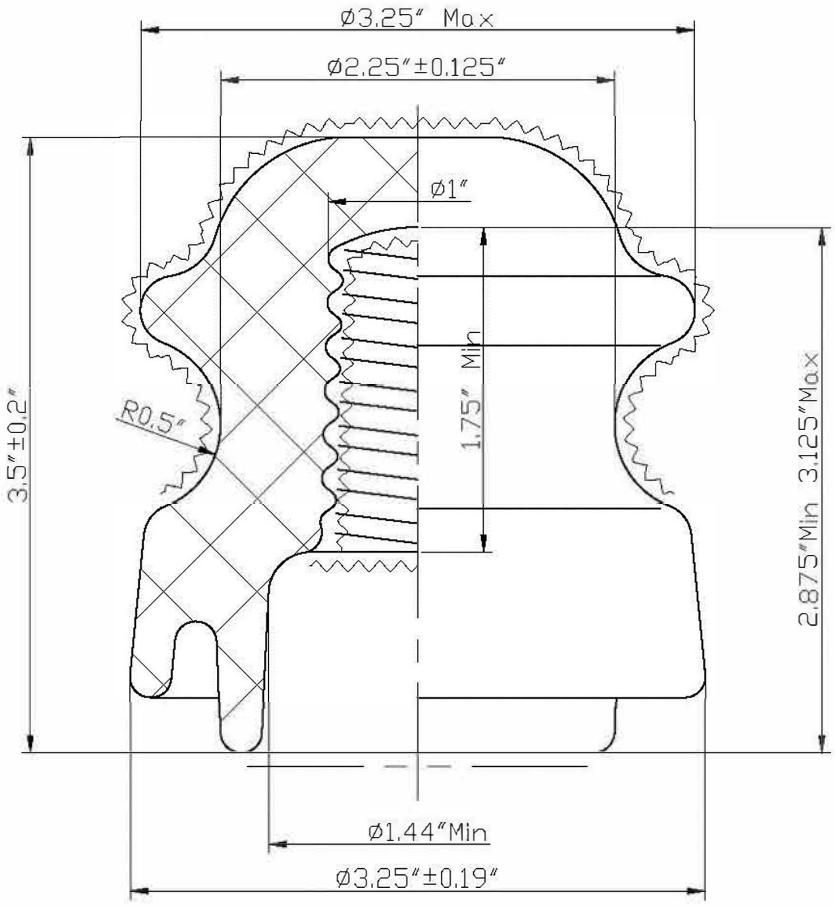


TECHNICAL DATA

| | |
|---|---|
| Type | ANSI 55-1 |
| Standard Applied | ANSI C29.5 |
| Main Dimensions | |
| D: | 3.25" |
| H: | 3.5" |
| Creepage Distance | 4" |
| Dry arcing distance | 2.25" |
| Cantilever Strength Load | 3000lbs |
| Low Frequency Dry Flashover Voltage | 35kV |
| Low Frequency Wet Flashover Voltage | 20kV |
| Impulse Flashover (positive) | 50kV |
| (negative) | 70kV |
| Power-Frequency Puncture Voltage | 50kV |
| Radio-Influence Voltage | |
| Test Voltage to Ground | 5kV |
| Maximum RIV, at 1000kHz | 50μV |

Visual Inspection According to IEC 383

****** MATERIAL: PORCELAIN

NEWELL-PSN LLC

| | | | | |
|---|---|---|---|---|
| DESIGN | | DRAWING | 3CY2.805.150 | PIN TYPE INSULATORS ANSI 55-1 2355510-7001 |
| CHECK | | REVISION | Jul.08,2013 | |
| ISSUED | | | | |