


**TECHNICAL DATA**

Type	ANSI 57-13B
Standard Applied	ANSI C29.7
Main Dimensions	D: 6.89"
	H: 15.87"
Creepage Distance	29"
Dry Arcing Distance	12.25"
Cantilever Strength Load	30001bs
Power Frequency Dry Flashover Voltage	125kV
Power Frequency Wet Flashover Voltage	100kV
Critical Impulse Flashover Voltage(Positive)	210kV
Radio-Influence Voltage	
Test Voltage to Ground	30kV
Maximum RIV, at 1000kHz	200 μ V
Visual Inspection According to IEC 383	

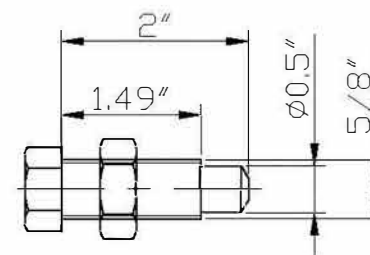

NEWELL-PSN LLC				
DESIGN		DRAWING	3CY2.807.161	POST TYPE INSULATORS ANSI 57-13 43940-7001
CHECK		REVISION	Nov. 06, 2014	
ISSUED				